


T3 series 120V Dimmable Under-cabinet lighting

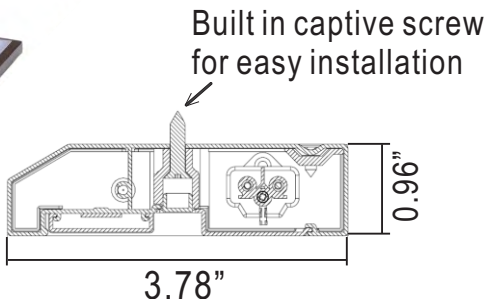

Catalog No. _____

Date _____

Type _____

Project _____


Fixture includes:

- Complete ready to install under-cabinet fixture
- Captive mounting screw already on fixture
- 1/2" Die-Cast metallic cable clamp
- Directly end-to-end connector



T3 series Dimensions for ordering codes:

- 8" fixture total length = 8.70" order code length = L200BD01
- 12" fixture total length = 12.30" order code length = L300BD01
- 18" fixture total length = 18.20" order code length = L450BD01
- 24" fixture total length = 24.20" order code length = L600BD01
- 32" fixture total length = 32.70" order code length = L800BD01

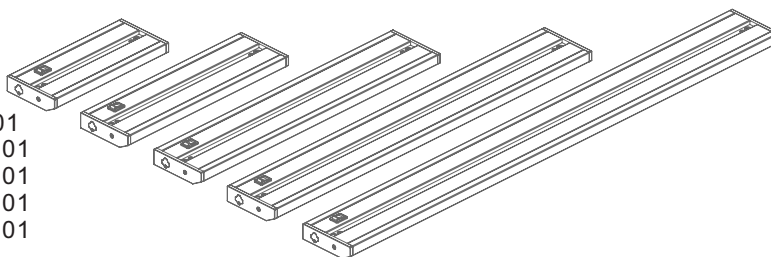

Available in five sizes:
Lengths = 8" (L200) | 12" (L300) | 18" (L450)
24" (L600) | 32" (L800)



Accessories:

| Item No. | Description |
|----------|-----------------------------|
| LJP 0150 | 6" Jumper/flex cord |
| LJP 0300 | 12" Jumper/flex cord |
| LJP 0600 | 24" Jumper/flex cord |
| LJP 1800 | 72" Jumper/flex cord |
| LPC1800 | 72" 3 prong Cord & plug set |

(Portable UL153 standard listing)

LJP & LPC cords available in **black or white** color only

JBL Direct wire junction box with switch
 JBL-OCS Direct wire Occupancy sensor box with switch
 JBL is under UL1598 standard as hardwired junction box
 available color is white and bronze same as under-cabinet fixtures
 For JBL Spec sheet please refer to JBL series for details

Finishes:



Bronze (BZ)

White (WH)

Photometric data and LM 79 please refer to our web site for downloading


Description

T3 series is a low profile under-cabinet fixture under 1" in height. Bright LED that is dimmable with most incandescent dimmers it provides even illumination from our diffuse lens to provide excellent lighting effect. Cool to touch operation and virtually no heat, no UV or forward heat. Low profile height = 0.96 inches. 5 sizes to choose from. Rear raceway cover and 1/2 inch knockout along back and top of fixture housing for easy access. Modular design for maximum flexibility and quick installation via captive screws.

LED Performance

- LED: 5630
- SDCM: 3 Step Macadam Elipse
- CCT: 3000K, 4000K
- CRI: >80 Typically 83 (Optional 90+ CRI is available)
- LIFE: 70% of initial lumens after 50,000 hrs
- Warranty: 5 Year Limited Fixture Warranty

Available accessories for T3 series

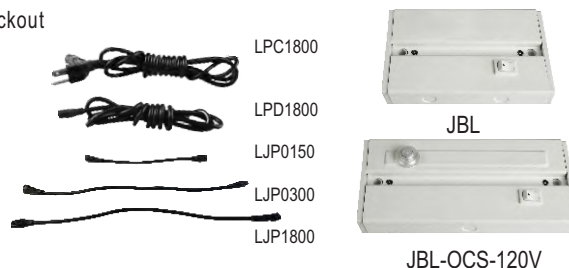

Example: To order T3 under-cabinet fixture in 24" white and 3000K = **T3L600BD01WH830**

| 1 Item Code | 2 Length Code | 3 Finish Code | 4 CCT Code |
|-------------|---------------|-----------------------|------------------------|
| T3 | L600BD01 | WH White BZ Bronze | 830 3000K 840 4000K |

Technical Specs

- 5 difference sizes dimmable under-cabinet fixtures
- 2.8~10.8 W dimmable under-cabinet fixtures
- Typical 250 lumen/foot
- Listing for hardwired and portable application
- Dimmable
- Linkable up to 400 watt
- Comply with Energy Star certifications.